



M98


Wireless Headset M98

User Manual

1. Product Specification

| | |
|--------------------------|-------------------------------------|
| Item No. | M98 |
| Bluetooth Version | V5.0, Class II |
| Chipset Solution | CSR BC8615 |
| Operation Frequency | 2.402 ~ 2.480GHz |
| Standby Time | About 200 hours |
| Charging Time | About 2 hours |
| Bluetooth Profile | A2DP AVRCP HFP HSP |
| Battery Capacity | 180mAh Rechargeable lithium battery |
| Charger | 5V DC ≤200mA |
| Work Temperature | -10—55 °C |
| Net Weight | About 49.5 g |
| Charging seat net weight | About 242 g |

2. Product Overview

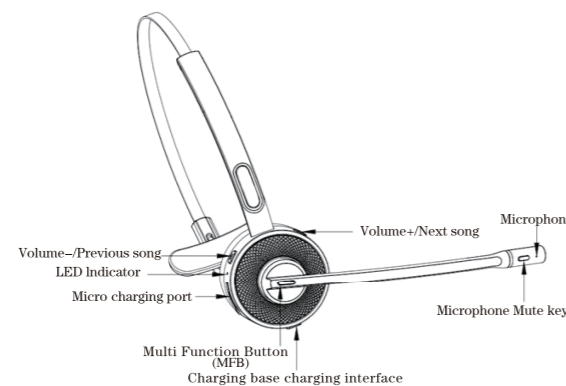

3. Basic Operation

-01-

For the first using, please fully charged the model M98

- 3.1 Power on: Long press MFB 3 seconds to power on
- 3.2 Power off: Long press MFB 3 seconds to power off
- 3.3 Pairing Mode: Make sure headset is in OFF state, press and hold the MFB button for about 6 seconds, until the indicator light alternates between blue and red, indicating that it is in pairing mode. If the headset never connected with any device before, just long press the MFB button for 3 seconds into pairing mode
- 3.4 Play / Pause: Short press MFB to play or pause when playing music
- 3.5 Answer / Hang up / Reject a call: When call coming, short press MFB to answer or hang up a call, long press to reject a call
- 3.6 Audio Switching: When calling, Long press MFB 1 second to choose the audio from headset.
- 3.7 Redial the last call: Standby mode, double press MFB to redial the last call.
- 3.8 Voice dialing: Standby mode, long press MFB 1 second to start voice dialing
- 3.9 Next song: When playing music, long press Volume + to next song
- 3.10 Last song: When playing music, long press Volume - to Last song
- 3.11 Volume up: When playing music / calling, short press Volume + to control the volume up
- 3.12 Volume down: When playing music / calling, short press Volume - to control the volume down
- 3.13 Microphone Mute: When calling, short press Microphone mute key to mute, do again to cancel mute

4. Bluetooth Pairing and Connection

- ①. Make sure the headset is in Off state, long press the MFB button for about 6 seconds, until the indicator light alternates between blue and red, indicating that it is in pairing mode. If the headset never connected with any device before, just long press the MFB button for 3 seconds to power on and into pairing mode
- ②. Search and click to connect "M98" on the phone Bluetooth device lists, LED turns to Blue LED flash once every 10 seconds after connected, could playing music or making calls from the phone to the headset.

4.1 Multi Point Connection

- A. Follow ① & ② to connected with the first device (phone, PC, laptop etc), turn off the Bluetooth function of the first device.
- B. Turn off the headset and turn on again to enter into pairing mode, search and click to connect "M98" on the second device (phone, PC, laptop etc.), Bluetooth device lists, LED turns to low Blue LED flash once every 10 seconds after connected.

-02-

- C. Turn on the Bluetooth function of the first device, research and reconnect M98 on it. The headset will connect with two devices after connected with the first one.



Notes:


Could only play music from one phone for multi point connection, need to stop one to play another.

5. Charging

Please charge M98 when it low battery with Red LED flash. Charging time about 2 hours with solid Red LED. Solid Blue LED when it full charged.

Connection for charging


Use charging cable to connect M98 and insert into USB charger (Car charger, power bank, computer USB etc) to charge the item.

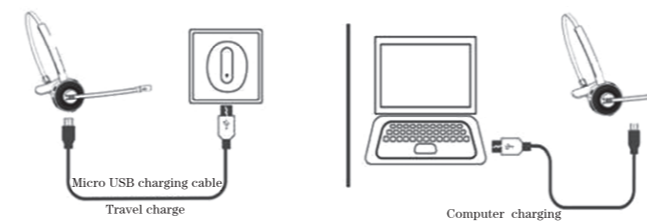

M98 How to use the charging stand

Please place the M98 on the charging base and contact it. Then connect to the charging port on the charging base through the Micro USB head of the Micro USB charging cable. USB head to USB charger (car charger, travel charger, computer USB, etc.)

-03-

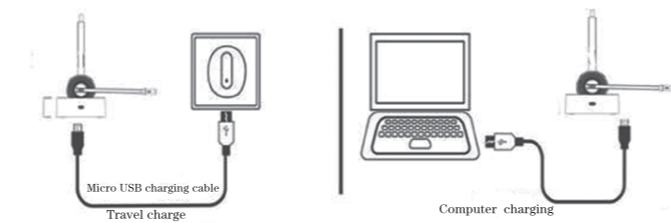

Notes:

Please charge M98 at least once every two months when without use. Please use the original charging cable to charge the item.

6. LED Indicator

| Status | LED Indicator |
|--------------------------|---|
| Power on | Blue light for 1 second |
| Power off | Red light for 1 second |
| Pairing mode | Red and Blue LED flash alternately |
| Unconnected standby mode | Blue light flashes once every 2 seconds |
| Connected standby mode | Blue light flashes once every 5 seconds |
| Music playing mode | Blue light flashes once every 5 seconds |
| Calling mode | Blue light flashes once every 5 seconds |
| Delete paired records | Red and blue lights flash 1 time |
| Low battery | Red LED flash |
| Charging | Solid Red LED |
| Full charged | Solid Blue LED |

7. Attention and Q & A

Q. Multi point connection

A: Could only play music from one phone for multi point connection, need to stop one to play another.

Q. Automatic power off

A: M98 will automatic power off when unconnected with any devices in 10 minutes.

Q. How to reconnect?

-04-

A: M98 will reconnect automatic with the paired devices when power on. If it can not reconnect automatically, please find the M98 in your Bluetooth device list and connect it manually.

Q. How to delete the paired records?

A: In the power-on state, press and hold the volume "+" button and the volume "-" button at the same time for 5 seconds to clear the pairing record. When the indicator light flash in red and blue for once simultaneously, then the pairing record has been cleared, and the headset will not be connected to the previously connected device automatically. Please try to clear the pairing record once there are any connection errors.

Q. Password for connect?

A: Please try 0000 (four zero), 8888 (four eight), 1111 (four one), 1234 (one two three four) as password for connection when need for some devices.

Q. Charging power supply?


A: Charging power supply: 5V, ≤500 MAH. (Charger, car charger, computer USB etc.)

Q. What is the advantage of using single-point microphone?

A: Using a single-point microphone can effectively reduce the ambient noise so that the other party can clearly hear your own voice and improve the quality of the call. The call effect is far superior to that of an ordinary omnidirectional microphone (a structure with a microphone bar is required, otherwise the speaking voice will be smaller)

8. Packaging Contents:

- A. M98 Wireless Headphone 1 pcs
- B. Wireless Headphone Charger 1 pcs
- C. Micro USB charging cable 1 pcs
- D. Manual 1 pcs

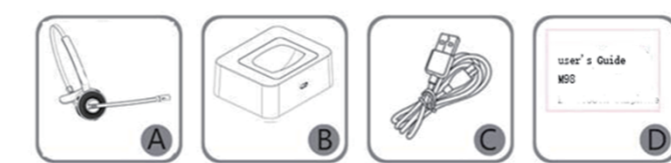

-05-

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

